


FISP® 10 Pin Xmega PDI Adapter

FISPPDI10R



The 10 pin FISP PDI (Programming and Debug Interface) adapter is used to program the Xmega microcontrollers using the standard 10 pin PDI interface. See our website for pricing and ordering information)

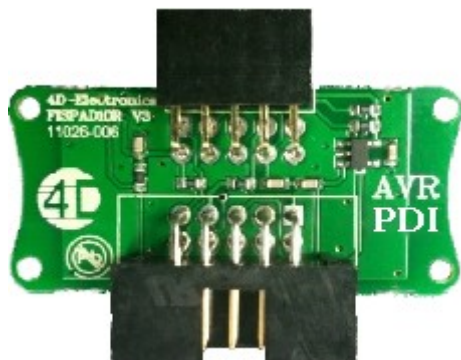


Specifications

- Dimensions
- 41mm x 20mm x 10.5mm
- Compatible with
- FISP-JTAG
- Compatible Devices
- Atmel Xmega PDI Micros

Instructions for use


Plug the black 10 pin **FEMALE** socket into the FISP.

Plug the provided 10-10 pin programming cable into the 10 pin adaptor socket.

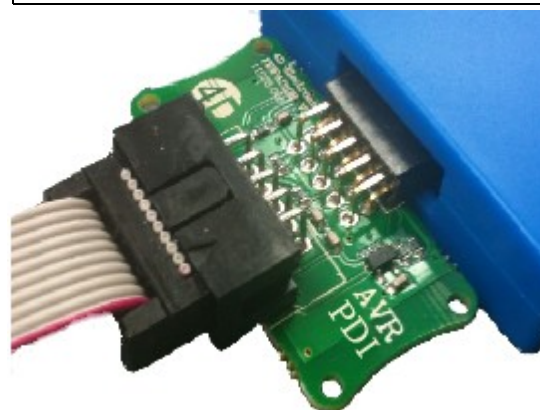


Connections

FISP



TARGET



DNC = Do Not Connect

Designed & Manufactured by:

4D Electronics Ltd
PO Box 13672
Christchurch 8141
New Zealand

Phone: +64 3 982 1113
Fax: +64 3 982 1114
Web: <http://www.fisp.co.nz>
E-mail: sales@fisp.co.nz