


FISP®

20 Pin ISP Adapter

FISPAD20R



The 20 pin FISP JTAG adapter is used to program those micro controllers using a standard 20 pin JTAG interface. See our website for pricing and ordering information

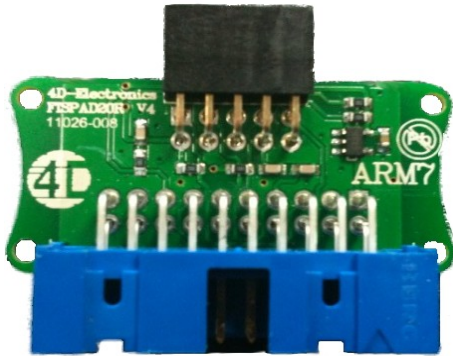


Specifications

- Dimensions
 - 41mm x 20mm x 10.5mm
- Compatible with
 - FISP-JTAG
 - Compatible Devices
 - Atmel ARM7 JTAG Microcontrollers

Instructions for use


Plug the black 10 pin **FEMALE** socket into the FISP.

Plug the provided 20-20 pin programming cable into the Blue 20 pin socket

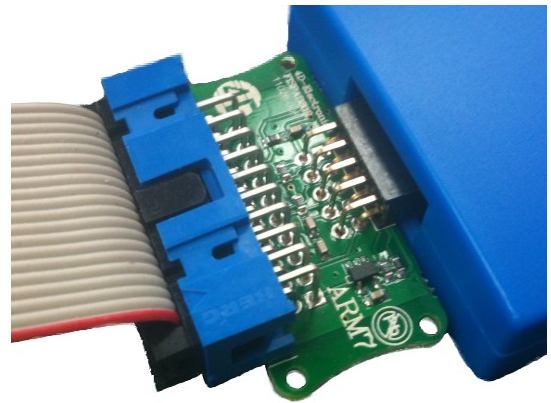


Connections

FISP



TARGET

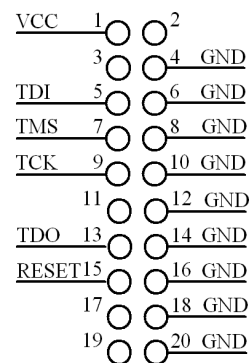

DNC = Do Not Connect

Designed & Manufactured by:

4D Electronics Ltd
PO Box 13672
Christchurch 8141
New Zealand

Phone: +64 3 982 1113
Fax: +64 3 982 1114
Web: <http://www.fisp.co.nz>
E-mail: sales@fisp.co.nz