


The 10 pin FISP PIC 9V adapter is used to program the Microchip PIC microcontrollers using a standard 2mm 10 pin box connector. See our website for pricing and ordering information

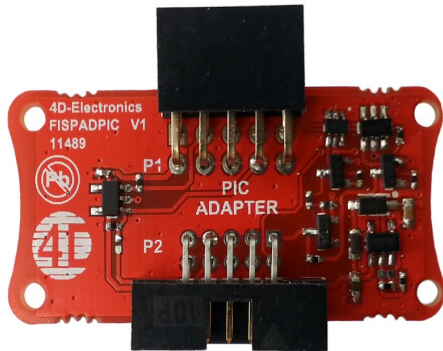


Specifications

- Dimensions
 - 41mm x 20mm x 10.5mm
- Compatible with
 - FISP-JTAG
- Compatible Target Devices
 - Microchip devices that are compatible with VPP of approx 9V e.g. PIC18FXXK80

Instructions for use

Plug the black 10 pin **FEMALE** socket into the FISP.

Plug the provided 10-10 pin programming cable into the 10 pin socket on the adaptor.

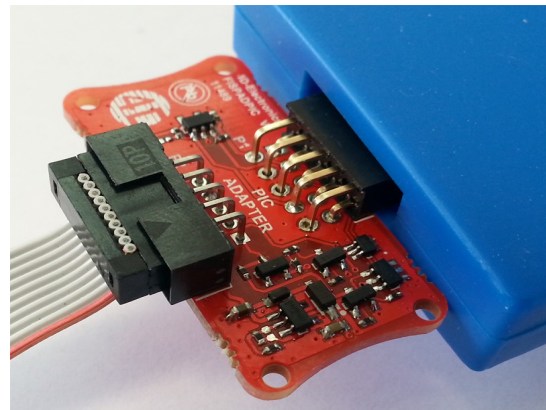

Connections

FISP

ICP DATA 1	○	2	○	VCC
DNC 3	○	4	○	GND
RESET/VPP 5	○	6	○	GND
ICP CLOCK 7	○	8	○	DNC
ICP DATA 9	○	10	○	GND

TARGET

VPP 1	○	2	○	VCC
GND 3	○	4	○	ICP DATA
ICP CLOCK 5	○	6	○	
	○	7	○	PGM
	○	8	○	
	○	9	○	GND
	○	10	○	

DNC - Do not connect

Designed & Manufactured by:

4D Electronics Ltd
 PO Box 13672
 Christchurch 8141
 New Zealand

Phone: +64 3 982 1113
 Fax: +64 3 982 1114
 Web: <http://www.fisp.co.nz>
 E-mail: sales@fisp.co.nz