


FISP® 20 Pin JTAG/SWD Adapter

FISPAD20R



The 20 pin FISP JTAG/SWD adapter is used to program microcontrollers with a standard 20 pin interface using the JTAG or SWD protocol. See our website for pricing and ordering information

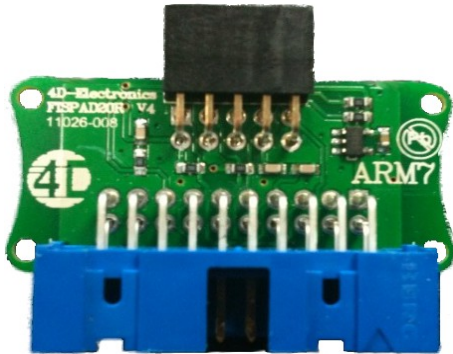


Specifications

- Dimensions
 - 41mm x 20mm x 10.5mm
- Compatible with
 - FISP-JTAG
- Compatible Target Devices include
 - Atmel ARM7 JTAG Microcontrollers
 - NXP ARM7 LPC Series Microcontrollers

Instructions for use

Plug the black 10 pin **FEMALE** socket into the FISP.

Plug the provided 20-20 pin programming cable into the 20 pin socket on the adaptor.

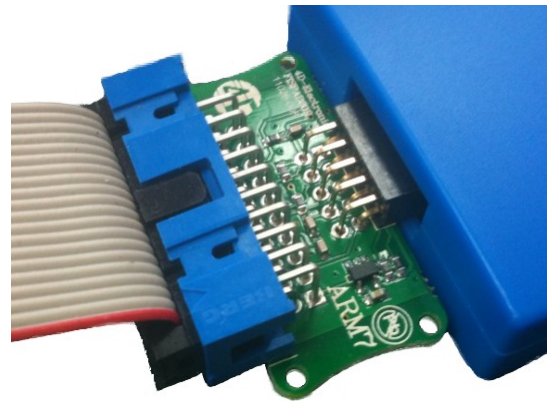

Connections

FISP			
TDI	1	2	VCC
TMS	3	4	GND
RESET	5	6	GND
TCK	7	8	DNC
TDO	9	10	GND

DNC - Do not connect

		TARGET	
VCC	1	2	
	3	4	GND
TDI	5	6	GND
TMS/SWDIO	7	8	GND
TCK/SWDCLK	9	10	GND
	11	12	GND
TDO	13	14	GND
RESET	15	16	GND
	17	18	GND
	19	20	GND

Designed & Manufactured by:

4D Electronics Ltd
PO Box 13672
Christchurch 8141
New Zealand

Phone: +64 3 982 1113
Fax: +64 3 982 1114
Web: <http://www.fisp.co.nz>
E-mail: sales@fisp.co.nz