


# FISP®

## MSP430 14 Pin JTAG Adapter

FISPAD14R



The MSP430 FISP JTAG adapter is used to program the Texas Instruments MSP430 microcontrollers using a standard 14s pin JTAG interface. See our website for pricing and ordering information

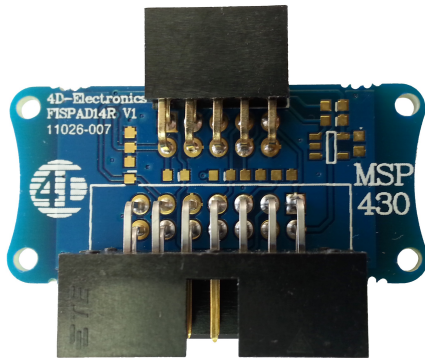


### Specifications

- Dimensions
- 41mm x 20mm x 10.5mm
- Compatible with
- FISP-JTAG
- Compatible Devices
- TI MSP430 JTAG Microcontrollers

### Instructions for use

Plug the black 10 pin **FEMALE** socket into the FISP.

Plug the provided 14-14 pin programming cable into the 14 pin adaptor socket.

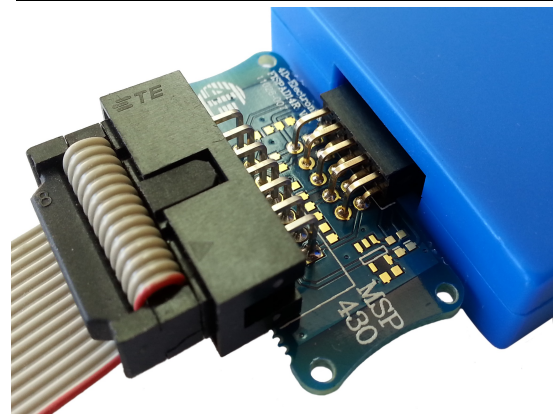

### Connections

<u>FISP</u>				<u>TARGET</u>			
TDI	1	2	VCC	TDO	1	2	VCC
TMS	3	4	GND	TDI	3	4	VCC
RESET	5	6	GND	TMS	5	6	NC
TCK	7	8	TEST	TCK	7	8	TEST
TDO	9	10	GND	GND	9	10	NC
				nRESET	11	12	NC
				DNC	13	14	NC

DNC - Do not connect

Designed & Manufactured by:

4D Electronics Ltd  
PO Box 13672  
Christchurch 8141  
New Zealand

Phone: +64 3 982 1113  
Fax: +64 3 982 1114  
Web: <http://www.fisp.co.nz>  
E-mail: [sales@fisp.co.nz](mailto:sales@fisp.co.nz)